


Weldlok[®] Unitary

For Performance Environments

High Performance Thermoset Adhesive

Primary Backing

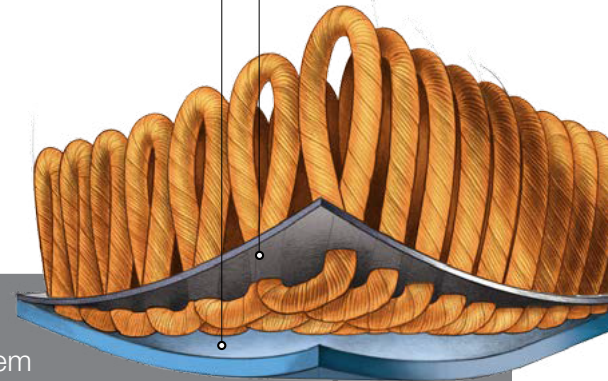

Weldlok[®] Unitary is a performance broadloom backing system engineered to provide long term carpet durability. Our Weldlok Unitary backing utilizes a performance thermoset adhesive to deliver dimensional stability and long term performance. The performance thermoset adhesive is designed with greater strength to encapsulate and penetrate the carpet back stitch in the application coat. Weldlok Unitary is ideal for performance environments.



PERFORMANCE

- Performance backing designed for demanding commercial environments
- High tuft bind properties
- Eliminates edge ravel
- For use with direct glue installations
- Limited 10 year Warranty protects against tuft bind, edge ravel.
- Ideal choice for performance commercial environments



BUDGET

- Performance backing offering meets most budget requirements



SUSTAINABILITY

- Recyclable
- Minimum of 50% Pre-Consumer Recycled Content
- May contribute to or comply with LEED credits MR 4.0, MR 5.0, IEQ 4.3 and innovation credit for NSF 140
- Certified low VOC's under CRI Green Label Plus Program



SERVICE

- Compliant with LEED EQ 4.1 low VOC emitting when installed with Mohawk Group recommended adhesive and seam sealer
- Products available through Quickship offering (up to 2,000 square yards within 10 business days)

INSTALLATION SPECIFICATIONS

Backing	Adhesive	Adhesive Application Method	Moisture & pH	Spread Rate	Seam Sealer
Weldlok® Unitary	Mohawk NuBroadlok Premium Multi-Purpose	Direct Glue: 1/8" x 1/8" x 1/8" U Notch Trowel Direct Glue: 1/8" x 1/8" x 1/16" V Notch Trowel	5lbs/ 80% RH, 5-9 pH	8-10 SY/Gal	Mohawk NuBroadlok Latex Seam Sealer

*Mohawk OptiSeal™ required for installations with subfloor moisture exceeding 5 lbs and/or 80% RH.
Maximum allowable moisture with OptiSeal™ is 90% RH.*

10 YEAR LIMITED WARRANTY*

LIFETIME LIMITED WEAR

Maintains at least 90% of surface pile weight

LIFETIME LIMITED STATIC PROTECTION

Will not give static discharge above 3.5KV

LIFETIME LIMITED TUFT BIND

Superior tuft bind capabilities in high traffic environments

LIFETIME LIMITED EDGE RAVEL

Ends will not ravel in normal use
(seam sealer required for Weldlok Unitary installations)

* See Mohawk Group official warranty documents for further details at www.mohawkgroup.com

LEED and the related logo is a trademark owned by the U.S. Green Building Council and is used with permission.